

XJ 迅捷[®]
XUNJIE



XJ 迅捷[®]
XUNJIE

专业品质 追求卓越
The specialized quality pursue is remarkable

慈溪市迅捷接插件有限公司

CIXI CITY XUNJIE SPLICES TERMINALS CO.,LTD
地址：中国浙江慈溪市周巷镇云城工业区 新周塘路438号
电话：0574-63327226 63318808
传真：0574-63327366
邮编：315324
邮箱：CXXUNJIE@126.COM
网址：<http://www.cxxunjie.com>

2013版

慈溪市迅捷接插件有限公司

CIXI CITY XUNJIE SPLICES TERMINALS CO.,LTD

企业团队 Enterprise group



没有完美的个人 只有完美的团队

“一根筷子容易弯，十根筷子折不断”，“我们都是一条链子上的一个环，环环相连、相依才会是一条完美的链子。”

目录

公司简介	1-2
生产设备	3-4
公司荣誉	5-6
产品物料编码规则	7-8
插簧系列	9-17
插片系列	18-24
压线扣	25-28
端子系列	29-33
护套系列	34-40
条形连接器系列	41-53
备注栏	54



公司简介

慈溪市迅捷插件有限公司位于浙江杭州湾南岸，毗邻上海。处在沪、杭、甬经济圈三角地带，交通十分方便，是全国三大电器之都之一。迅捷是一家集开发、制造、销售为一体的专业电子连接器的制造企业，本公司生产的产品广泛用于家用电器、汽车、通讯设备等领域，是宁波地区最早集自主设计、生产、销售为一体的连接器生产商。

公司已有十多年的发展历程，十分注重技术研发、设备的革新，不断引进和吸收国内外的电子制造的顶尖技术、生产设备和检测仪器来优化企业自身，具备强大的产品自主开发设计和一流的制造加工能力，在同行中处于技术领先地位并保持国际领先水平，我们可以根据客户要求设计生产各种精密成型模具和钢材制品，并且具备完善的质量检测体系。目前公司产品主要与全国最大取暖器生产商先锋电器直接供货，与国内主要电器品牌九阳、三星等一线品牌间接配套等。

为了确保用户得到放心满意的产品，企业拥有ROSH、CQC、ISO9001认证，正在通过UL认证，本公司真诚感谢国内外新老客户的支持与厚爱，诚信、合作、共赢是我们的营销理念，全体迅捷人期待您的光临，愿我们携手并进，走向辉煌明天！

Brief introduction

Cixi XunJie Connector Co.,Ltd is located in the south of Hangzhou Bay, and adjacent to Shanghai. It is in Hangzhou Bay economic circle, which is one of the country's three electrical appliances. It is specialized in development, sales and manufacturing of electronic connectors, which are widely applied in fields of household appliances, autos and communication equipments.

We have decades of development. Through focusing on technology, equipment innovation and optimizing the enterprise itself by continuously introducing and absorbing top-class technology in domestic and foreign electronic manufacturing and process capability, it ranking top in the industry and internationally advanced. The company can manufacture various precise moulds and steel products as per customers' requirement with perfect quality testing system to ensure that the users can get proper and satisfactory products. Now we offer products to the country's largest heater manufacture Xianfeng directly, and we also cooperate with other electronic brands like Jiuyang and Samsung.

We having passed ROSH, CQC and ISO9001 certification, and will get UL certification soon. Old and new customers from home and abroad are welcome to our company for purchase and we are ready for further strengthening technical and business cooperation and create better future in joint hands.



线速车间



组装车间

注塑车间



冲压车间



模具加工车间

企业荣誉 ENTERPRISE HONOURS




资质 Qualification

质量认证，企业全球化的通行证，也是企业管理的起点。
Quality certification is the passport for company globalization and also the start point for company management.




产品物料编码规则

端子编码规则

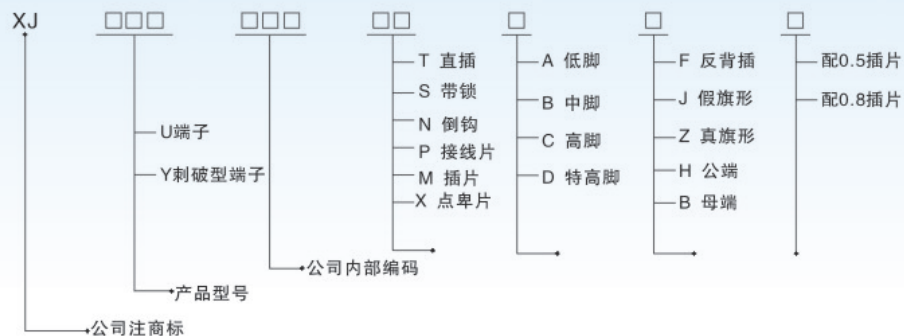


塑体/针座编码规则

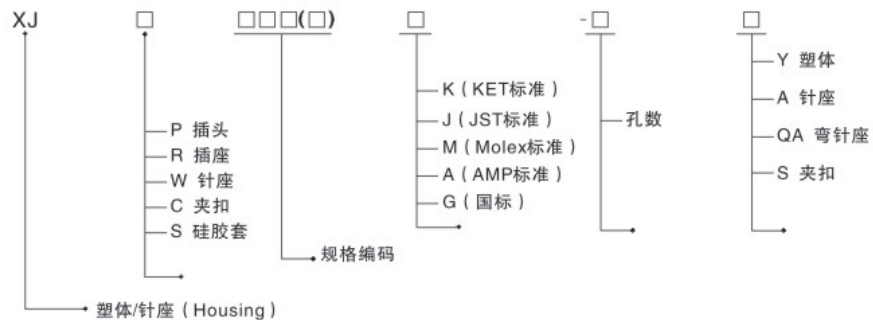

PVC软护套编码规则








110连接器系列



TAB	250	187
A	6.35	4.75
B	4.06	3.18
C	8.0	6.35
D	0.8	0.5

187连接器系列



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187042T0BJ5	0.5-1.5	20-16	磷/黄铜	14.3	6.6	5.8	0.5/0.8	0.35		
XJ187042T0BJ8	0.5-1.5	20-16		14.3	6.6	5.8	0.5/0.8	0.35		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187044TNB05	0.2-0.15	24-20	磷/黄铜	11.3	5.6	5.8	0.5/0.8	0.35		
XJ187044TNB08	0.2-0.15	24-20		11.3	5.6	5.8	0.5/0.8	0.35		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187039TSB08	0.5-1.5	20#-16#	磷铜	17	6.0	5.5	0.8	0.30		
XJ187038TSA05	0.5-1.0	20#-16#	H62	17	6.0	5.5	0.5	0.32		
XJ187038TSA08	0.5-1.0	20#-16#	H62	17	6.0	5.5	0.8	0.32		
XJ187041TSB08	1.0-2.0	20#-16#	H62	17	6.0	5.5	0.8	0.32		
XJ187041TSB05	0.5-1.5	20#-16#	H62	17	6.0	5.7	0.5	0.32		
XJ187037TSA08	1.5-1.5	20#-16#	磷铜	17	6.0	5.7	0.8	0.30		
XJ187037TSA05	0.5-1.0	20#-16#	磷铜	17	6.0	5.6	0.5	0.30		
XJ187039TSB05	0.5-1.5	20#-16#	磷铜	17	6.0	5.6	0.5	0.30		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187050TSBZ5	0.75-1.25	18-14	磷/黄铜	6.4	12.2	5.6	0.8	0.35		
XJ187050TSBZ8	0.75-1.25	18-14		6.4	12.2	5.6	0.8	0.35		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187046TOBZ5	0.75-1.25	18-14	磷/黄铜	6.4	12.2	5.6	0.8	0.35		
XJ187046TOBZ8	0.75-1.25	18-14		6.4	12.2	5.6	0.8	0.35		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ110020T0B08	0.75-1.5	18-16	磷/黄铜	3.8	15.5	6.4	0.5	0.25		
XJ110020T0B05	0.75-1.5	18-16		3.8	15.5	6.4	0.5	0.25		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ110022TSB08	0.3-0.75	22-18	磷/黄铜	3.9	17.7	6.0	0.5/0.8	0.25		
XJ110022TSB05	0.3-0.75	22-18		3.9	17.7	6.0	0.5/0.8	0.25		


型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ110034TNB05	0.3-0.75	22-18	黄铜	90.6	12.0	9.8	0.5	0.5		
XJ110034TNC05	0.3-0.75	22-18		90.6	12.0	9.8	0.5	0.5		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ110032TNB08	0.5-0.75	22-18	黄铜	16.1	4.0	0.5	0.25			


187连接器系列




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187045T0B05	0.75-1.5	18#-14#	中碳钢	15.4	6.3	6.0	0.8	0.4		
XJ187045T0B08	0.75-1.5	18#-14#	中碳钢	15.4	6.6	6.0	0.5	0.4		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187077T0D08	1.0-2.0	16#-14#	黄铜	15.4	6.0	5.6	0.8	0.32		
XJ187077T0D05	1.0-2.0	16#-14#	黄铜	15.4	6.0	5.6	0.5	0.32		
XJ187040T0B05	0.5-1.5	20#-16#	黄铜	15.2	6.2	5.6	0.5	0.35		
XJ187040T0B08	0.5-1.5	20#-16#	黄铜	15.2	6.2	5.6	0.8	0.35		
XJ187034T0A05	0.3-1.0	24#-16#	磷铜	15.4	6.1	5.7	0.5	0.3		
XJ187034T0A08	0.3-1.0	24#-16#	磷铜	15.4	6.1	5.7	0.8	0.3		
XJ187035T0A08	0.3-1.0	22#-16#	黄铜	15.4	6.1	5.7	0.8	0.32		
XJ187035T0A05	0.3-1.0	20#-16#	黄铜	15.4	6.1	5.7	0.5	0.32		
XJ187034T0B08	0.5-1.5	20#-16#	磷铜	15.3	6.3	5.7	0.8	0.3		
XJ187034T0B05	0.5-1.5	20#-16#	磷铜	15.3	6.3	5.7	0.5	0.3		
XJ187036T0B05	0.5-1.5	20#-16#	黄铜	15.3	6.3	5.7	0.5	0.32		
XJ187036T0B08	0.5-1.5	20#-16#	黄铜	15.3	6.3	5.7	0.8	0.32		



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187042TSBJ8	0.3-0.75	22-18	磷/黄铜	17.2	6.0	5.6	0.5/0.8	0.3		
XJ187042TSBJ5	0.75-1.5	18-16		17.2	6.0	5.6	0.5/0.8	0.3		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187069T0BF8	0.5-1.0	20-16	H62	16.5	6.3	5.8	0.5	0.4		
XJ187069T0BF5	0.5-1.0	20-16		16.5	6.3	5.8	0.8	0.4		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ187073T0BF8	0.5-1.0	20-16	H62	16	6.4	6.6	0.5	0.4		
XJ187073T0BF5	0.5-1.0	20-16		16	6.4	6.6	0.8	0.4		


250连接器系列



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250062TSA08	0.5-0.75	20#-18#	黄铜	20.7	7.4	7.26	0.8	0.37		
XJ250066TSB08	0.5-1.0	20#-16#	黄铜	20.5	7.4	7.2	0.8	0.37		
XJ250064TSB08	0.5-1.5	20#-16#	磷铜	20.5	7.4	7.2	0.8	0.35		
XJ250074TSC08	1.0-2.0	16#-14#	黄铜	20.2	7.3	7.16	0.8	0.4		
XJ250070TSB08	0.5-1.5	20#-16#	黄铜	20.2	7.3	7.3	0.8	0.4		
XJ250081TSD08	1.5-2.5	20#-16#	黄铜	20.2	7.3	7.3	0.8	0.4		
XJ250086TSD08	1.5-2.5	20#-16#	黄铜	20.6	7.9	7.9	0.8	0.4		
XJ250056TSA08	0.75-1.0	18#-16#	黄铜	20.7	7.3	7.3	0.8	0.32		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250070T0B08	0.75-1.5	18#-14#	黄铜	19.2	8.0	5.8	0.8	0.4		
XJ250057T0B08	0.5-1.0	20#-16#	黄铜	17	7.8	4.7	0.8	0.37		
XJ250056T0B08	0.5-1.5	20#-16#	磷铜	17	7.8	4.9	0.8	0.35		
XJ250090T0B08	0.75-2.0	18#-14#	黄磷铜	18.6	7.64	6.0	0.8	0.5		
XJ250074T0B08	0.75-1.5	20#-16#	黄铜	19.6	8.3	5.1	0.8	0.4		
XJ250065T0B08	0.5-1.5	20#-16#	磷铜	17	7.8	4.7	0.8	0.4		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250105TSBZ8	0.75-1.5	18-14	黄铜	17	7.9	7.5				


250连接器系列




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250074NB08	0.3-0.75	22-18	黄铜	24.7	7.9	6.3	0.8	0.4		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250083TSBJ8	0.5-1.0	20-16	磷铜	19.4	8.2	7.6	0.5	0.35		
XJ250095TSBJ8	0.5-1.0	20-16	黄铜	19.4	8.2	7.6	0.8	0.4		



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250073T0BJ8	0.75-1.5	18-14	黄磷铜	15.7	7.7	7.7		0.4		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250093T0BZ8	0.75-1.5	18-14	黄铜	14	7.6	8.1		0.4		

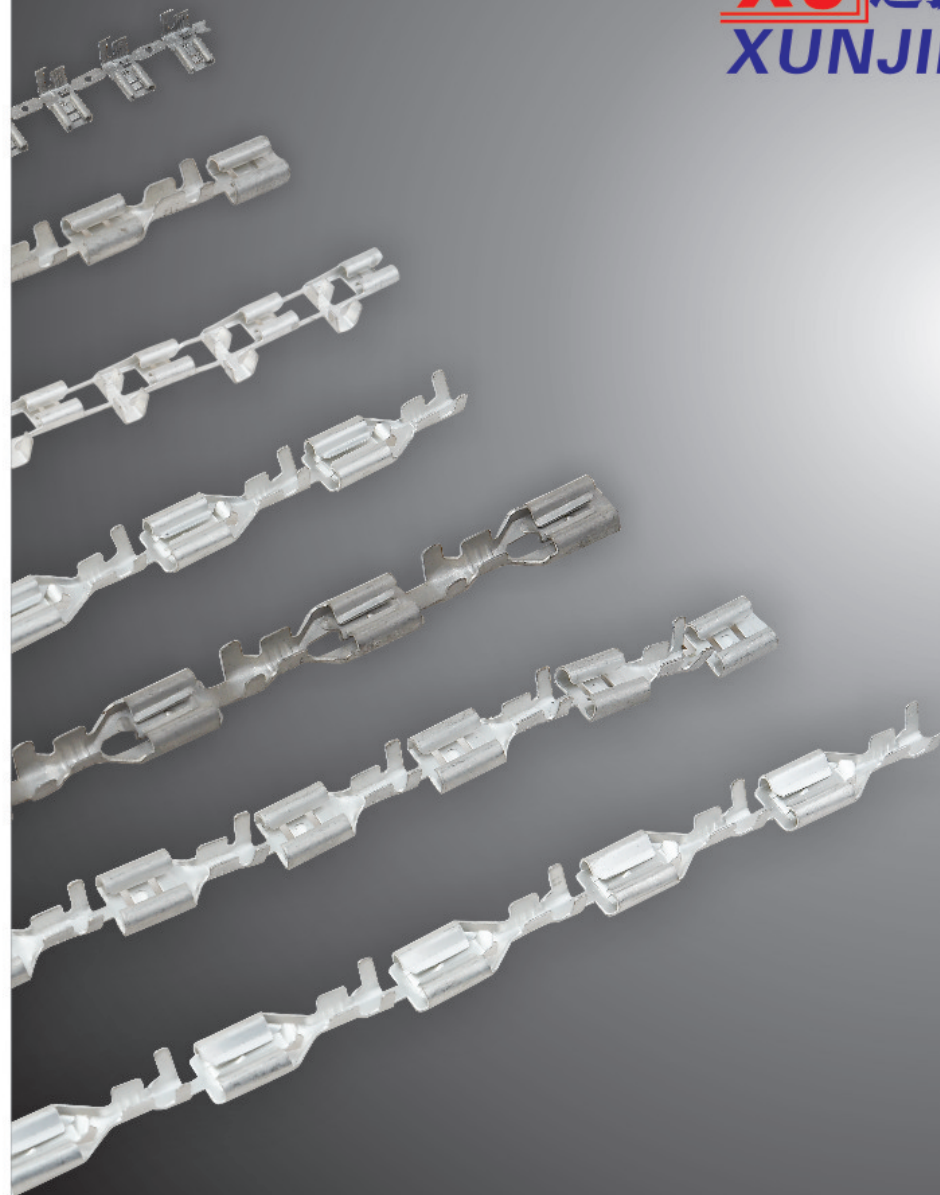


187/250连接器系列



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Qty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250	0.3-0.75	22-18	磷/黄铜	23.2	6.5	7.5	0.8	0.4		
	0.75-2.5	18-14		23.2	6.5	7.5	0.8	0.4		
	1.5-4.0	16-12		23.2	6.5	7.5	0.8	0.4		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Qty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250113T0BF8	0.75-1.5	18#-16#	黄铜	18.1	7.8	4.7	0.8	0.4		



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Qty/reel	备注 Note
	mm ²	AWG#		L	E	W				
XJ250121TSBE8	0.75-1.5	16-18	黄铜	21	7.36	4.7	0.8	0.4		


110/187/250POLE HOUSING

XJR11031G-1Y




适用端子 (Suitable Terminal)
XJ2.8直插

XJR18731A-1Y(172074)




适用端子 (Suitable Terminal)
187带锁

XJR25031A-1Y(172076)




适用端子 (Suitable Terminal)
250带锁

XJR18736K-2Y(630721)




适用端子 (Suitable Terminal)
187带锁

XJR25032A-2Y




适用端子 (Suitable Terminal)
250带锁

XJR25083G-2Y(632202)




适用端子 (Suitable Terminal)
250带锁

110/187/250POLE HOUSING

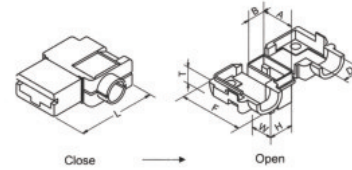


型号 (Part No.)	对应型号 (Part No.)	尺寸 (Size) (mm)								适用端子 (Suitable Terminal)	材料 (Material)
		D	A	B	F	T	W	H	C		
XJOF187	OF-187	3.2	6.4	3.0	13.4	5.0	8.0	4.6	15.7		PA66
XJOF250	OF-250	3.8	8.8	3.8	15.3	5.8	8.04	5.4	18.8		PA66

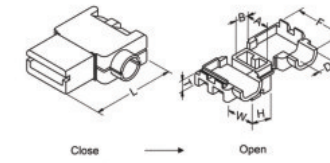

型号 (Part No.)	对应型号 (Part No.)	尺寸 (Size) (mm)								适用端子 (Suitable Terminal)	材料 (Material)
		D	A	B	F	T	W	H	C		
XJPF-250	PF-250	4.1	8.2	3.6	17.0	3.5	10.0	5.3	19.5		PA66


250 HOUSING

XJR25011G-1Y

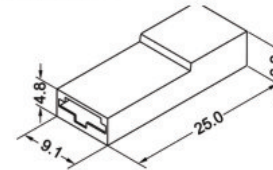


适用端子 (Suitable Terminal)

XJR25012G-1Y

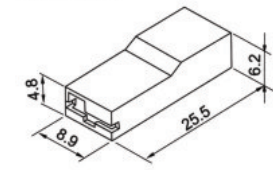


187 HOUSING

XJR18711G-1Y

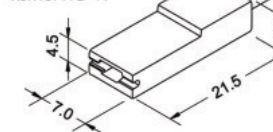


适用端子 (Suitable Terminal)


XJR18712G-2Y

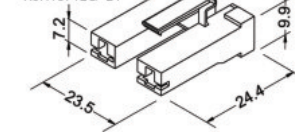







XJR18712G-3Y

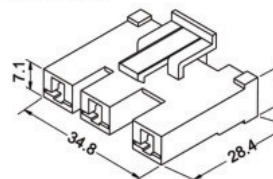

XJR18713G-2Y

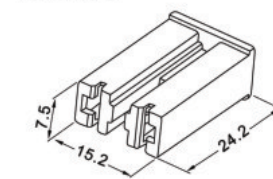

110/187插片系列



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
110	0.3-0.75	22-18	黄铜	2.8	20.6	12.0	0.5	0.5	15000pcs	
110	0.75-1.5	18-16		2.8	20.6	12.0	0.5	0.5	15000pcs	

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ11041MNB05	0.75-1.5	18-16	黄铜Brass	2.8	20.6	12.0	0.5	0.5	15000pcs	


型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
110	-	-	黄铜Brass	2.8	44.0	12.1	0.5	0.5	2000pcs	

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
187	-	-	黄铜Brass	4.8	23.0	6.5	0.5/0.8	0.5/0.8	2000pcs	


型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ110032M0C08	-	-	黄铜Brass	4.8	13.9	6.8	0.8	0.8	2000pcs	
XJ110029M0A08	-	-		4.8	13.1	6.8	0.5	0.5	2000pcs	

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
187	-	-	黄铜Brass	4.8	12.6	6.7	0.5	0.5	2000pcs	


187/250插片系列




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ187042M0B05	0.5-1.5	20-16	黄铜Brass	4.7	16.5	6.2	0.5	0.5/0.8	10000pcs	




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
250	-	-	黄铜Brass	6.3	26.2	8.0	0.8	0.8	2000pcs	




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ250040M0B08	-	-	黄铜Brass	6.4	13.4	8.0	0.8	0.8	2000pcs	



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ250041M0B08	-	-	黄铜	6.4	13.8	7.8	0.8	0.8	2000pcs	



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
250	0.75-1.5	-	黄铜	6.3	20.0	8.0	0.8	0.8	6000pcs	

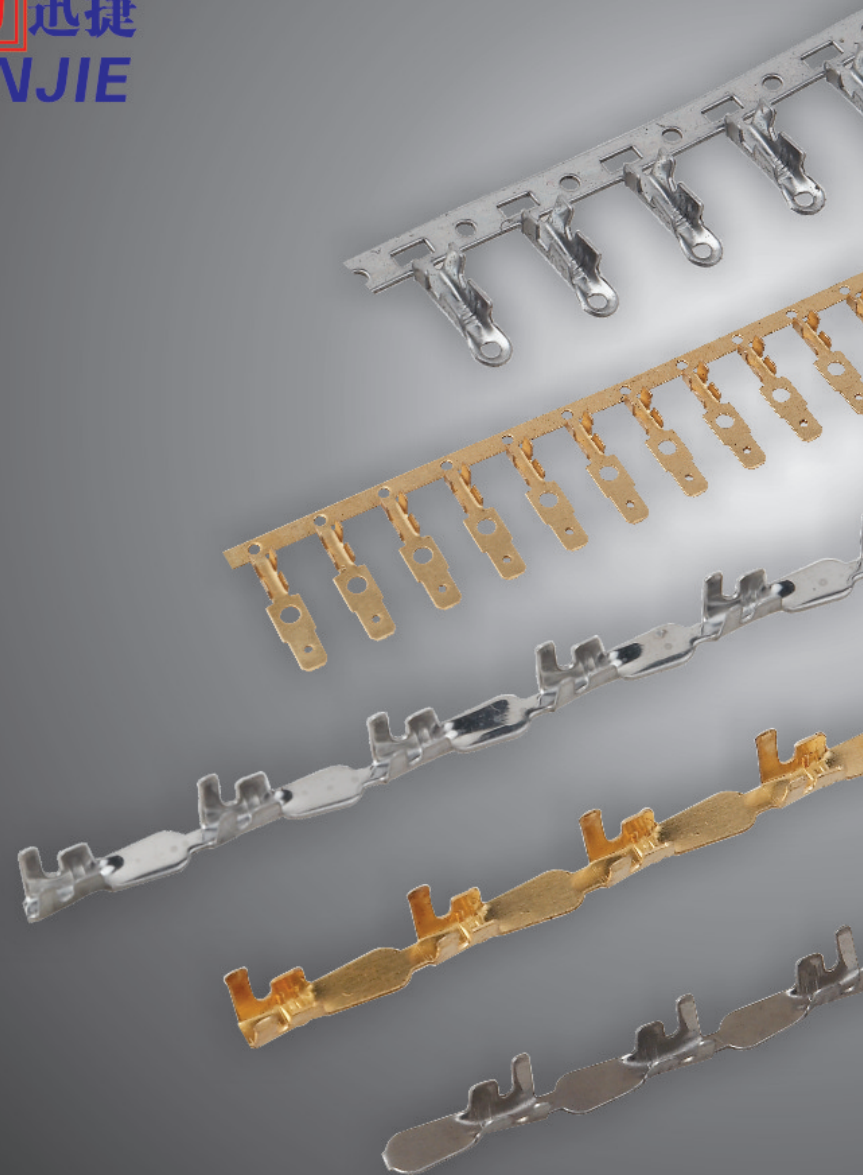


187/250插片系列




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ187069TMB05	0.75-1.5	-	黄铜	4.0	23	14.5				


187/250插片系列




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ150017P0B00	0.5-1.0	-	不锈钢	3.0	9.8			0.3		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ350016XPB00	0.5-1.0	-	不锈钢	-	13	7		0.35		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ250068MPB00	0.5-1.0	-	黄铜	3.0/3.8	20.8	12		0.4		



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ350015XPB00	0.5-1.0	-	不锈钢	4.0	11.5	6.4		0.35		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ250070MPC08	1.0-2.0	-	黄铜	4.0/4.8	20.8	12		0.3		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ150020P0B00	0.5-1.0	-	不锈钢	3.0	7.8			0.35		


高压端子&子弹型端子




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	L	E				
XJ39600000AH0	0.5-0.8	20-18	黄铜Brass	3.96	17.2	9.0		0.5	10000pcs	
XJ39600000BH0	1.25-3.0	20-18		3.96	17.2	9.0		0.5	10000pcs	
XJ39600000CH0	1.25-3.0	16-12		3.96	17.2	9.0		0.5	10000pcs	




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	L	E				
XJ39600000AV0	0.5-0.8	20-18	黄铜	3.96	17.2	9.0		0.5	10000pcs	
XJ39600000BV0	1.25-3.0	20-18		3.96	17.2	9.0		0.5	10000pcs	
XJ39600000CV0	1.25-3.0	16-12		3.96	17.2	9.0		0.5	10000pcs	



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	L	E				
XJ39604100BV0	0.5-0.8	20-18	黄铜	3.96	17.4	6.5		0.4	10000pcs	




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	L	E				
XJ44000000AH0	0.5-0.6	20-18	黄铜Brass	4.4	23.7	11.8		0.5	2000pcs	
XJ44000000BH0	0.8-1.5	18-16		4.4	23.7	11.8		0.5	2000pcs	
XJ44000000CH0	0.3-0.8	22-18		4.4	22.2	11.8		0.4		







型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	L	E				
XJ44000000AV0	0.5-0.6	20-18	黄铜Brass	4.4	23.7	10.6		0.4	2000pcs	
XJ44000000BV0	0.8-1.5	18-16		4.4	23.7	10.6		0.4	2000pcs	
XJ44000000CV0	0.3-0.8	20-18		4.4	23.2	10.6		0.4		

叉形及钩形



环形连接器系列



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)				插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	W	E	L				
XJ32600000B00	0.3-0.82	22-18	黄铜	3.2	6.8	5.4	16.4		0.5		


型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	D	W				
XJ280020P0A00	0.5-1.0	20-18	H62	14.5	2.8	6.55	0.32	0.32		
XJ250009P0B00	0.2-0.5	24-20		10.3	2.5	4.7	0.3	0.3		
XJ250008P0A00	0.2-0.5	24-20		9.8	2.5	4.7	0.3	0.3		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)				插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	W	E	L				
XJ320040P0B00	0.75-1.5	18-16	H62	17	3.25	6.1		0.45	0.45		
XJ320017P0A00	0.5-1.0	20-18	H62	14	3.25	6.1		0.3	0.3		
XJ320020P0A00	0.5-1.0	20-18	H62	15	3.25	6.6		0.32	0.32		
XJ320022P0B00	0.5-1.0	20-18	H62	16	3.25	6.8		0.32	0.32		
XJ320024P0C00	0.75-1.5	18-16	H62	16	3.25	6.8		0.32	0.32		
XJ320017P0A00	0.5-1.0	20-18	H62	11.5	3.25	6.0		0.4	0.4		
XJ320014P0A00	0.5-1.0	20-18	H62	14	3.25	6.1		0.25	0.25		
XJ3200265P0B0	0.5-1.5	20-16	H62	16	3.25	6.8		0.4	0.4		
XJ320030P0C00	0.75-2.0	18-14	H62	17	3.25	7.0		0.5	0.5		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		L	D	W				
XJ420020P0B00	0.5-1.5	20-16	H62	16	4.25	6.9	0.32	0.32		
XJ420037P0C00	0.75-2.0	18-14		17	4.25	7.1	0.5	0.5		
XJ420030P0C00	0.75-2.0	18-14		17	4.25	7.1	0.4	0.4		
XJ420027P0B00	0.5-1.5	20-16		16	4.25	6.9	0.4	0.4		
XJ420025P0B00	0.5-1.5	20-16		16	4.25	6.9	0.37	0.37		
XJ520046P0C00	0.75-1.5	18-16		19.2	5.25	8.4	0.5	0.5		
XJ520038P0C00	0.75-1.5	18-16		19.2	5.25	8.4	0.4	0.4		
XJ620066P0C00	0.75-2.0	18-14		21.6	6.4	10	0.5	0.5		

型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)				插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		D	W	E	L				
XJ439043P0B00	0.5-2.27	20-14	黄铜	4.3	9.5	6.8	19.8		0.5	5000pcs	
XJ439039P0B00	0.5-2.27	20-14		3.9	9.5	6.8	19.8		0.5	5000pcs	
XJ439024P0B00	0.5-2.27	20-14		4.3	9.5	2.4	19.8		0.5	5000pcs	


压线扣




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJ9mm10900B00	0.75-1.0	20-16	H65	2.5	9		0.3			
XJ20010000B00	0.75-1.0	2.0mm ²	H62	3.3	8.1		0.3			
XJ15015000B00	0.75-1.0	1.5mm ²	H62	3.0	6.1		0.25			
XJ07517000B00	0.75-1.0	0.75mm ²	H62	2.8	6.1		0.25			
XJ05019000B00	0.75-1.0	0.5mm ²	H62	2.5	6.3		0.25			
XJ03021500B00	0.75-1.0	0.3mm ²	H62	2.45	6.3		0.25			



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJTS031G00B00	0.5-1.25	20-16	黄铜	2.5	14.4	-		5500pcs		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJ9mm23000B00	0.75-1.0	18-16	H62	2.5	2.3		0.3			




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJU0000800B00	0.5-1.0	20-18	H62	2.45	8.0	5.0	0.25			
XJU0001200B00	0.5-1.5	20-16	不锈钢	3.2	7.6	4.5	0.35			
XJU0001500B00	0.5-1.5	20-16	H62	3.2	7.6	4.5	0.3			
XJU0001600B00	0.5-1.5	20-16	H62	3.1	8.9	5.8	0.3			
XJU0001300B00	0.75-1.5	18-14	H62	3.3	8.2	5.2	0.25			
XJU0001400B00	0.75-1.5	18-14	H62	2.9	10	7.0	0.25			
XJU0002300B00	1.0-2.0	16-14	H62	4.7	7.5	4.1	0.4			
XJU0001900B00	0.5-1.5	20-16	不锈钢	4.7	7.5	4.1	0.35			


刺破型压线扣



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJ00Y01400A00	0.5-0.75	20-18	黄铜	3.3	8.0	-	0.4	5500pcs		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJ00Y01500B00	0.5-1.0	20-16	黄铜	3.8	8.0	-	0.4	5500pcs		




型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L					
XJ00Y03100B00	1.0-2.0	16-14	黄铜	5.2	9.0	-	0.4	5500pcs		


刺破型端子



XJR28041G-2Y ④
DJ7021A-2.8-21




XJY05001G-2Y ZC05




材料(Material): PBT UL94V-0
颜色(Color): 黑色(Black)

XJR28041G-2Y ②
DJ7021A-2.8-11




XJY06001G-3Y ZC06




材料(Material): PBT UL94V-0
颜色(Color): 黑色(Black)


XJR28041G-6Y ③
DJ7061A-2.8-21



XJR28041G-6Y ①
DJ7061A-2.8-11




XJY09001G-3Y ZC09




材料(Material): PBT UL94V-0
颜色(Color): 黑色(Black)

④ ELECTRICAL CRIMP TERMINALS



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)						
	mm ²	AWG#		T	T1	t	D	E	L	W
631	0.75-1.5	18-16	黄铜	1.5	1.0	0.65	2.5	20.5	29.4	6.3
631	0.75-1.5	18-16		1.5	1.0	0.65	2.5	24.5	32.6	6.3
631	0.75-1.5	18-16		1.6	1.0	0.65	2.5	18.2	29.0	6.3



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Qty/reel	备注 Note
	mm ²	AWG#		W	L	E				
280	0.5-1.5	18-16	黄铜	2.8	20.5	12.5		0.4	4000pcs	

品字尾一体件



冷压端子系列




叉形预绝缘端头 (TU-JTK型)

导线截面: 0.5-1.5mm² (美国线规22-16) 最大电流: I_{max}=19A

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	
XJ1.25-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.3	红
XJ1.25-3.5S	#6	3.7mm	5.7	21.2	6.5			
XJ1.25-3.5L	#6	3.7mm	6.4	21.2	6.5			
XJ1.25-4S	#8	4.3mm	6.4	21.2	6.5			
XJ1.25-4M	#8	4.3mm	7.2	21.2	6.5			
XJ1.25-4L	#8	4.3mm	8.1	21.2	6.5			
XJ1.25-5S	#10	5.3mm	8.1	21.2	6.5			
XJ1.25-5L	#10	5.3mm	9.5	21.2	6.5			
XJ1.25-6S	1/4	6.5mm	9.5	21.2	6.5			
XJ1.25-6L	1/4	6.5mm	12.0	27.2	11.0			
XJ1.25-8	5/16	8.5mm	14.0	29.0	12.5			

导线截面: 1.5-2.5mm² (美国线规16-14) 最大电流: I_{max}=27A

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	
XJ2-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.9	兰 blue
XJ2-3.5S	#6	3.7mm	5.7	21.2	6.5			
XJ2-3.5L	#6	3.7mm	6.4	21.2	6.5			
XJ2-4S	#8	4.3mm	6.4	21.2	6.5			
XJ2-4M	#8	4.3mm	7.2	21.2	6.5			
XJ2-4L	#8	4.3mm	8.1	21.2	6.5			
XJ2-5S	#10	5.3mm	8.1	21.2	6.5			
XJ2-5L	#10	5.3mm	9.5	21.2	6.5			
XJ2-6S	1/4	6.5mm	9.5	21.2	6.5			
XJ2-6L	1/4	6.5mm	12.0	27.2	11.0			
XJ2-8	5/16	8.5mm	14.0	29.0	12.5			



导线截面: 2.5-4mm² (美国线规14-12) 最大电流: I_{max}=37A

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	
XJ3.5-3	#4	3.2mm	5.7	24.8	7.0	12.5	6.2	黑 black
XJ3.5-4	#8	4.3mm	8.0	24.8	7.0			
XJ3.5-5	#10	5.3mm	8.0	24.8	7.0			
XJ3.5-6	1/4	6.5mm	12.0	28.0	12.1			

导线截面: 4-65mm² (美国线规12-10) 最大电流: I_{max}=48A

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	
XJ5.5-3.5	#6	3.7mm	8.3	25.2	7.5	12.5	6.5	黄 yellow
XJ5.5-4S	#8	4.3mm	8.3	25.2	7.5			
XJ5.5-4L	#8	4.3mm	9.0	25.2	7.5			
XJ5.5-5	#10	5.3mm	9.0	25.2	7.5			
XJ5.5-6S	1/4	6.5mm	9.0	25.2	7.5			
XJ5.5-6L	1/4	6.5mm	12.0	31.2	12.0			
XJ5.5-8	1/4	8.4mm	14.0	30.0	11.5			

冷压端子系列




叉形裸端头 (TU型)

导线截面: 0.5-1.5mm² (美国线规22-16) 最大电流: I_{max}=19A

型号 (Part No.)	尺寸 Dimensions mm							
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	dΦ mm
XJ1.25-3	#4	3.2mm	5.7	16.0	6.5	4.8	3.4	1.7
XJ1.25-3.5S	#6	3.7mm	5.7	16.0	6.5			
XJ1.25-3.5L	#6	3.7mm	6.4	16.0	6.5			
XJ1.25-4S	#8	4.3mm	6.4	16.0	6.5			
XJ1.25-4M	#8	4.3mm	7.2	16.0	6.5			
XJ1.25-4L	#8	4.3mm	8.1	16.0	6.5			
XJ1.25-5S	#10	5.3mm	8.1	16.0	6.5			
XJ1.25-5L	#10	5.3mm	9.5	16.0	6.5			
XJ1.25-6S	1/4	6.5mm	9.5	16.0	6.5			
XJ1.25-6L	1/4	6.5mm	12.0	22.0	11.0			
XJ1.25-8	5/16	8.4mm	14.0	23.5	12.5			

导线截面: 1.5-2.5mm² (美国线规16-14) 最大电流: I_{max}=27A

型号 (Part No.)	尺寸 Dimensions mm							
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	dΦ mm
XJ2-3	#4	3.2mm	5.7	16.0	6.5	4.8	4.1	2.3
XJ2-3.5S	#6	3.7mm	5.7	16.0	6.5			
XJ2-3.5L	#6	3.7mm	6.4	16.0	6.5			
XJ2-4S	#8	4.3mm	6.4	16.0	6.5			
XJ2-4M	#8	4.3mm	7.2	16.0	6.5			
XJ2-4L	#8	4.3mm	8.1	16.0	6.5			
XJ2-5S	#10	5.3mm	8.1	16.0	6.5			
XJ2-5L	#10	5.3mm	9.5	16.0	6.5			
XJ2-6S	1/4	6.5mm	9.5	16.0	6.5			
XJ2-6L	1/4	6.5mm	12.0	22.0	11.0			
XJ2-8	5/16	8.4mm	14.0	23.5	12.5			



冷压端子系列



圆形预绝缘端头 (TO-JTK型)


导线截面: 2.5-4mm² (美国线规14-12) 最大电流: I_{max}=37A

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	
XJ3.5-4	#8	4.3mm	8.0	24.5	7.7	12.5	6.2	黑 black
XJ3.5-SS	#10	5.3mm	8.0	24.5	7.7			
XJ3.5-5M	#10	5.3mm	9.5	25.5	8.3			
XJ3.5-5L	#10	5.3mm	12.0	27.9	7.7			
XJ3.5-6	1/4	6.5mm	12.0	27.9	7.7			
XJ3.5-8	5/16	8.4mm	15.0	32.0	13.5			
XJ3.5-10	3/8	10.5mm	15.0	32.0	13.5			

导线截面: 4-6mm² (美国线规12-10) 最大电流: I_{max}=48A

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	DΦ mm	
XJ5.5-3.5	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	黄 yellow
XJ5.5-4S	#8	4.3mm	7.2	21.4	5.9			
XJ5.5-4L	#8	4.3mm	9.5	25.5	8.3			
XJ5.5-5	#10	5.3mm	9.5	25.5	8.3			
XJ5.5-6	1/4	6.5mm	12.0	28.8	12.0			
XJ5.5-8	5/16	8.4mm	15.0	33.7	13.7			
XJ5.5-10	3/8	10.5mm	15.0	33.7	13.7			
XJ5.5-12	1/2	13.0mm	19.2	38.1	16.0			

型号 (Part No.)	尺寸 Dimensions mm							颜色 Color
	螺栓口直径 D2Φ	B mm	L mm	F mm	E mm	DΦ mm		
XJ8-5	5.3	10.8	31	9	16	9.5	红 red	
XJ8-6	6.5	10.8	31	9				
XJ8-8	8.5	14.8	38	13.5				
XJ8-4	4.3	8.8	31	9.3				
XJ8-5S	5.5	8.8	31	9.3				
XJ8-5M	5.5	12.0	32.3	9.3				
XJ8-6S	6.5	12.0	32.3	9.3				
XJ8-6L	6.5	15.0	38.3	13.8				
XJ8-8	8.5	15.0	38.3	13.8				
XJ8-10	10.5	15.0	38.3	13.8				
XJ8-12	12.5	22.0	48	17.0				



冷压端子系列



圆形裸端头 (TO型)

导线截面: 6-10mm² (美国线规8) 最大电流: I_{max}=62A

型号 (Part No.)	尺寸 Dimensions mm							E mm	DΦ mm	dΦ mm
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm					
XJ8-4S	#8	4.3mm	8.8	23.8	9.3	8.5	7.2	4.5		
XJ8-4L	#8	4.3mm	12.0	23.8	9.3					
XJ8-5S	#10	5.3mm	8.8	23.8	11.1					
XJ8-5M	#10	5.3mm	12.0	23.8	9.3					
XJ8-5L	#10	5.3mm	15.0	29.8	13.8					
XJ8-6S	1/4	6.5mm	12.0	23.8	9.3					
XJ8-6L	1/4	6.5mm	15.0	29.8	13.8					
XJ8-8	5/16	8.4mm	15.0	29.8	13.8					
XJ8-10	3/8	10.5mm	15.0	29.8	13.8					
XJ8-12	1/2	13.0mm	20.0	33.5	15.0					

导线截面: 10-16mm² (美国线规6) 最大电流: I_{max}=88A

型号 (Part No.)	尺寸 Dimensions mm							E mm	DΦ mm	dΦ mm
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm					
XJ14-4	#8	4.3mm	12.0	29.8	13.3	10.5	9.0	5.8		
XJ14-5	#10	5.3mm	12.0	29.8	13.3					
XJ14-6S	1/4	6.5mm	12.0	28.8	13.3					
XJ14-6L	1/4	6.5mm	16.0	32.8	13.3					
XJ14-8	5/16	8.4mm	16.0	32.8	14.5					
XJ14-10	3/8	10.5mm	16.0	32.8	14.5					
XJ14-12	1/2	13.0mm	22.0	41.0	19.5					

导线截面: 16-25mm² (美国线规4) 最大电流: I_{max}=115A


型号 (Part No.)	尺寸 Dimensions mm							E mm	DΦ mm	dΦ mm
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm					
XJ22-5S	#10	5.3mm	12.2	33.2	14.5	12.5	11.5	7.7		
XJ22-5L	#10	5.3mm	16.5	33.7	13.5					
XJ22-6S	1/4	6.5mm	12.2	33.2	14.5					
XJ22-6L	1/4	6.5mm	16.5	33.7	13.5					
XJ22-8	5/16	8.4mm	16.5	33.7	13.5					
XJ22-10	3/8	10.5mm	16.5	33.7	13.5					
XJ22-11	7/8	11.5mm	22.0	42.5	19.5					
XJ22-12	1/2	13.0mm	22.0	42.5	19.5					

导线截面: 25-35mm² (美国线规2) 最大电流: I_{max}=160A

型号 (Part No.)	尺寸 Dimensions mm							E mm	DΦ mm	dΦ mm
	美制 螺栓号	螺栓口直径 d2	B mm	L mm	F mm					
XJ38-5	#10	5.3mm	15.3	39.0	18.3	14.0	13.3	9.4		
XJ38-6	1/4	6.5mm	15.3	39.0	18.3					
XJ38-8S	5/16	8.4mm	15.3	39.0	18.3					
XJ38-8L	5/16	8.4mm	22.0	42.7	17.7					
XJ38-10S	3/8	10.5mm	15.3	39.0	18.3					
XJ38-10L	3/8	10.5mm	22.0	42.7	17.7					
XJ38-11	7/16	11.5mm	22.0	42.7	17.7					
XJ38-2	1/2	13.0mm	22.0	42.7	17.7					


直形护套系列

110直形护套



型号 (Part No.)	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
	mm ²	AWG#	W1	W2	D	L	Q1	Q2		
XJ110-25-20	0.3-0.75	22-18	3.8	2.2	2.5	20	12.0	5.0	2000pcs	
XJ110-25-21	0.3-0.75	22-18	3.8	2.2	2.5	21	13.0	5.0	2000pcs	
XJ110-25-22	0.3-0.75	22-18	3.8	2.2	2.5	21	14.0	5.0	2000pcs	
XJ110-25-23	0.3-0.75	22-18	3.8	2.2	2.5	23	15.0	5.0	2000pcs	
XJ110-25-24	0.3-0.75	22-18	3.8	2.2	2.5	24	16.0	5.0	2000pcs	
XJ110-30-20	0.75-1.25	18-16	3.8	2.2	2.5	20	12.0	5.0	2000pcs	
XJ110-30-21	0.75-1.5	18-16	3.8	2.2	2.5	21	13.0	5.0	2000pcs	
XJ110-30-22	0.75-1.5	18-16	3.8	2.2	2.5	22	14.0	5.0	2000pcs	
XJ110-30-23	0.75-1.5	18-16	3.8	2.2	2.5	23	15.0	5.0	2000pcs	
XJ110-37-20	14-12or20+20		3.8	2.2	2.5	20	12.0	5.0	2000pcs	

187直形护套

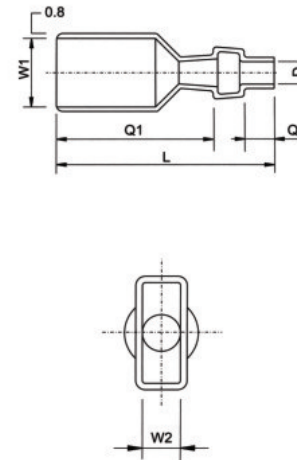

型号 (Part No.)	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
	mm ²	AWG#	W1	W2	D	L	Q1	Q2		
XJ187-25-21	0.3-0.75	22-18	5.8	2.3	2.5	21	12.0	5.0	2000pcs	
XJ187-25-22	0.3-0.75	22-18	5.8	2.3	2.5	22	14.0	5.0	2000pcs	
XJ187-25-23	0.3-0.75	22-18	5.8	2.3	2.5	23	15.0	5.0	2000pcs	
XJ187-25-24	0.3-0.75	22-18	5.8	2.3	2.5	24	16.0	5.0	2000pcs	
XJ187-25-25	0.3-0.75	22-18	5.8	2.3	2.5	25	17.0	5.0	2000pcs	
XJ187-28-22	0.5-0.75	20-18	5.8	2.3	2.8	22	14.0	5.0	2000pcs	
XJ187-28-23	0.5-0.75	20-18	5.8	2.3	2.8	23	15.0	5.0	2000pcs	
XJ187-28-24	0.5-0.75	20-18	5.8	2.3	2.8	24	16.0	5.0	2000pcs	
XJ187-28-25	0.5-0.75	20-18	5.8	2.3	2.8	25	17.0	5.0	2000pcs	
XJ187-28-35	0.5-0.75	20-18	5.8	2.3	2.8	35	27.0	5.0	2000pcs	
XJ187-30-22	0.75-1.5	18-16	5.8	2.3	3.0	22	14.0	5.0	2000pcs	
XJ187-30-20	0.75-1.5	18-16	5.8	2.3	3.0	20	12.0	5.0	2000pcs	
XJ187-30-24	0.75-1.5	18-16	5.8	2.3	3.0	24	16.0	5.0	2000pcs	
XJ187-30-23.5	0.75-1.5	18-16	5.8	2.3	3.0	23.5	15.5	5.0	2000pcs	
XJ187-32-22	0.75-1.5	18-16	5.8	2.3	3.2	22	14.0	5.0	2000pcs	
XJ187-32-20	0.75-1.5	18-16	5.8	2.3	3.2	20	12.0	5.0	2000pcs	
XJ187-35-22	1.5-2.5	16-14	5.8	2.3	3.5	22	14.0	5.0	2000pcs	
XJ187-35-20	1.5-2.5	16-14	5.8	2.3	3.5	20	12.0	5.0	2000pcs	
XJ187-35-25	1.5-2.5	16-14	5.8	2.3	3.5	25	17.0	5.0	2000pcs	
XJ187-35-27	1.5-2.5	16-14	5.8	2.3	3.5	27	19.0	5.0	2000pcs	
XJ187-40-22	14-12or20+20		5.8	2.3	4.0	22	14.0	5.0	2000pcs	
XJ187-40-23.5	14-12or20+20		5.8	2.3	4.0	23.5	15.5	5.0	2000pcs	
XJ187-40-24	14-12or20+20		5.8	2.3	4.0	24	16.0	5.0	2000pcs	
XJ187-40-27	14-12or20+20		5.8	2.3	4.0	27	17.0	5.0	2000pcs	
XJ187-40-22	14-12or20+20		5.8	2.3	4.5	22	14.0	5.0	2000pcs	
XJ187-40-25	14-12or20+20		5.8	2.3	4.5	25	17.0	5.0	2000pcs	




直形护套系列




205直形护套

型号 (Part No.)	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
	mm ²	AWG#	W1	W2	D	L	Q1	Q2		
XJ205-25-23	0.3-0.75	22-16	6.3	3.0	2.5	23	15	5.0	2000pcs	
XJ205-30-21	0.75-1.5	18-16	6.3	3.0	3.0	21	13	5.0	2000pcs	
XJ205-30-23	0.75-1.5	18-16	6.3	3.0	3.0	23	15	5.0	2000pcs	
XJ205-30-25	0.75-1.5	18-16	6.3	3.0	3.0	25	17	5.0	2000pcs	




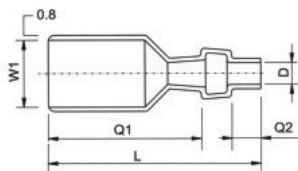


250直形护套

型号 (Part No.)	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
	mm ²	AWG#	W1	W2	D	L	Q1	Q2		
XJ205-25-18	0.3-0.75	22-18	7.8	3.3	2.5	18	10	5.0	2000pcs	
XJ205-25-25	0.3-0.75	22-18	7.8	3.3	2.5	25	17	5.0	2000pcs	
XJ205-25-26	0.3-0.75	22-18	7.8	3.3	2.5	26	18	5.0	2000pcs	
XJ205-25-27	0.3-0.75	22-18	7.8	3.3	2.5	27	19	5.0	2000pcs	
XJ205-28-24	0.5-0.75	20-18	7.8	3.3	2.8	24	16	5.0	2000pcs	
XJ205-28-25	0.5-0.75	20-18	7.8	3.3	2.8	25	17	5.0	2000pcs	
XJ205-28-26	0.5-0.75	20-18	7.8	3.3	2.8	26	19	5.0	2000pcs	
XJ205-30-25	0.75-1.5	18-16	7.8	3.3	3.0	25	17	5.0	2000pcs	
XJ205-30-26	0.75-1.5	18-16	7.8	3.3	3.0	26	18	5.0	2000pcs	
XJ205-30-27	0.75-1.5	18-16	7.8	3.3	3.0	27	19	5.0	2000pcs	
XJ205-30-28	0.75-1.5	18-16	7.8	3.3	3.0	28	20	5.0	2000pcs	
XJ205-30-29	0.75-1.5	18-16	7.8	3.3	3.0	29	21	5.0	2000pcs	
XJ205-32-25	0.75-1.5	18-16	7.8	3.3	3.2	25	17	5.0	2000pcs	
XJ205-35-25	1.5-2.5	16-14	7.8	3.3	3.5	25	17	5.0	2000pcs	
XJ205-37-25	14-12or20+20	7.8	3.3	3.7	25	17	5.0	2000pcs		
XJ205-40-25	14-12or20+18	7.8	3.3	4.0	25	17	5.0	2000pcs		
XJ205-45-25	12-10or18+18	7.8	3.3	4.5	25	17	5.0	2000pcs		
XJ205-50-25	16-16or18+16	7.8	3.3	5.0	25	17	5.0	2000pcs		
XJ205-52-25	16-16or18+14	7.8	3.3	5.2	25	17	5.0	2000pcs		



旗形护套系列



187旗形护套

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	W1	W2	L1	L2			
XJ187-30-12	A	0.5-1.5	20-16	3.0	5.8	2.5	12.0	14.0		2000pcs	
XJ187-30-14	A	0.5-1.5	20-16	3.0	5.8	2.5	14.0	14.0		2000pcs	
XJ187-35-14	A	0.75-2.5	18-14	3.5	5.8	2.5	14.0	14.0		2000pcs	
XJ187-35-16	A	0.75-2.5	18-14	3.5	5.8	2.5	16.0	14.0		2000pcs	
XJ187-40-14	A	14+12or20+18		4.0	5.8	2.5	16.0	14.0		2000pcs	

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	E	W1	W2	L1	L2		
XJ187-KM-12	B	ALL SIZE		3.0	8.0	5.8	2.5	12.0	13.0	2000pcs	
XJ187-KM-13	B	0.5-1.5	20-16	3.0	8.0	5.8	2.5	13.0	13.0	2000pcs	
XJ187-KM-14	B	0.5-1.5	20-16	3.0	8.0	5.8	2.5	14.0	13.0	2000pcs	
XJ187-KM-16	B	0.5-1.5	20-16	3.0	8.0	5.8	2.5	16.0	17.0	2000pcs	

205旗形护套

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	E	W1	W2	L1	L2		
XJ205-35-16	A	0.75-2.5	18-14	3.5	6.3	3.0	16.0	15.0		2000pcs	
XJ205-KM-16	B	ALL SIZE		3.2	6.3	3.0	16.0	15.0		2000pcs	

250旗形护套


型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	E	W1	W2	L1	L2		
XJ205-30-14	A	0.75-1.5	18-16	3.0	9.0	8.0	3.5	14.0	16.0	2000pcs	
XJ205-30-17	A	0.75-1.5	18-16	3.0	9.0	8.0	3.5	17.0	16.0	2000pcs	
XJ205-30-18	A	0.75-1.5	18-16	3.0	9.0	8.0	3.5	18.0	16.0	2000pcs	
XJ205-35-16	A	1.5-2.5	16-14	3.5	9.0	8.0	3.5	16.0	16.0	2000pcs	
XJ205-35-17	A	1.5-2.5	16-14	3.5	9.0	8.0	3.5	17.0	16.0	2000pcs	
XJ205-40-17	A	14+12or20+18		4.0	9.0	8.0	3.5	17.0	16.0	2000pcs	
XJ205-50-17	A	14+10or18+16		5.0	9.0	8.0	3.5	17.0	16.0	2000pcs	

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	E	W1	W2	L1	L2		
XJ205-KM35-17	B	ALL SIZE		3.5	10.0	8.0	3.5	17.0	12.0	2000pcs	
XJ205-KM-13	B	0.75-1.5	18-16	4.0	10.0	8.0	4.0	13.0	12.0	2000pcs	
XJ205-KM-14	B	0.75-1.5	18-16	4.0	10.0	8.0	4.0	14.0	12.0	2000pcs	
XJ205-KM-15	B	0.75-1.5	18-16	4.0	10.0	8.0	4.0	15.0	12.0	2000pcs	
XJ205-KM-16	B	0.75-1.5	18-16	4.0	10.0	8.0	4.0	16.0	12.0	2000pcs	
XJ205-KM-17	B	ALL SIZE		4.0	10.0	8.0	4.0	17.0	12.0	2000pcs	


方形护套系列



(A)



(B)



110方形护套

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ110-21	A	ALL SIZE		4.0	2.3	3.3	1.0	9.5	4.0	21.0	2000pcs	
XJ110-23	A	ALL SIZE		4.0	3.4	3.3	1.0	9.5	4.0	23.0	2000pcs	

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ110-S-23	A	-	-	5.5	5.5	2.6	1.0	9.0	6.5	23.0	2000pcs	

187方形护套

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ187-21	A	ALL SIZE		5.7	5.6	2.5	1.1	9.0	5.0	21.0	2000pcs	
XJ187-23	A	ALL SIZE		5.7	5.6	2.5	1.1	9.0	5.0	23.0	2000pcs	
XJ187-24	A	ALL SIZE		5.7	5.6	2.5	1.1	9.0	5.0	24.0	2000pcs	

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ187-S-22	B	ALL SIZE		5.7	5.8	3.2	1.1	9.0	6.8	22.0	2000pcs	
XJ187-S-23	B	ALL SIZE		5.7	5.8	3.2	1.1	9.0	6.8	23.0	2000pcs	
XJ187-S-24	B	ALL SIZE		5.7	5.8	3.2	1.1	9.0	6.8	24.0	2000pcs	

205方形护套


型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ205-22	A	ALL SIZE		6.5	6.1	2.7	1.3	9.5	5.0	22.0	2000pcs	
XJ205-24	A	ALL SIZE		6.5	6.1	2.7	1.3	9.5	5.0	24.0	2000pcs	

250方形护套


型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ250-25	A	ALL SIZE		7.9	7.9	3.0	1.3	10.5	5.5	26.0	2000pcs	
XJ250-26	A	ALL SIZE		7.9	7.9	3.0	1.3	10.5	5.5	25.0	2000pcs	
XJ250-27	A	ALL SIZE		7.1	7.9	3.0	1.3	10.5	5.5	27.0	2000pcs	

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q'ty/reel	备注 Note
		mm ²	AWG#	W1	W2	W3	W4	Q1	Q2	L		
XJ250-S-26	B	ALL SIZE		8.0	7.6	3.7	3.7	10.5	7.3	27.0	2000pcs	
XJ250-S-27	B	ALL SIZE		8.0	7.6	3.7	3.7	10.5	7.3	26.0	2000pcs	


250 "W" 口直径护套系列



(A)



(B)



250 "W" 口直护套 OTHER RULER SLEEVE

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	W1	W2	Q1	Q2	L		
XJ250-32-26	A	18+18		3.2	7.8	3.3	6.0	17.0	26.0	2000pcs	
XJ250-35-18	A	16+16		3.2	7.8	3.3	5.5	17.0	27.0	2000pcs	
XJ250-35-26	A	16+16		3.5	7.8	3.3	6.0	17.0	26.0	2000pcs	
XJ250-29-26	A	14+14		3.9	7.8	3.3	6.0	17.0	26.0	2000pcs	
XJ250-39-27	A	14+14		3.9	8.0	3.5	5.5	17.0	27.0	2000pcs	

"V" 帽形护套 "V" TYPE OF CAP SLEEVE



型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)						Q'ty/reel	备注 Note
		mm ²	AWG#	D	W1	W2	Q1	Q2	L		
XJV223-28-13	B	0.5-0.75	20-18	2.8	3.3	3.1	6.0	7.0	13.0	2000pcs	
XJV223-33-14	B	0.75-1.5	18-16	3.3	4.2	3.5	7.0	7.0	14.0	2000pcs	
XJV223-35-14	B	1.5-2.5	16-14	3.5	4.4	3.7	7.0	7.0	14.0	2000pcs	
XJV223-37-16	B	2.5-4.0	14-12	3.7	4.7	4.0	8.0	8.0	16.0	2000pcs	
XJV223-40-16	B	2.5-4.0	14-12	4.0	4.9	4.0	8.0	8.0	16.0	2000pcs	
XJV223-47-17	B	4.0-6.0	12-10	4.7	5.5	4.3	9.0	8.0	17.0	2000pcs	
XJV223-52-18	B	4.0-6.0	12-10	5.2	6.3	5.5	9.0	9.0	18.0	2000pcs	
XJV223-62-19	B	4.0-6.0	12-10	6.2	7.2	6.2	10.0	9.0	19.0	2000pcs	

子弹形护套系列




子弹形插头护套

型号 (Part No.)	图片 Type	适用电线范围 (Wire Range)		尺寸 (Size) (mm)							Q1y/reel	备注 Note
		mm ²	AWG#	D	W1	W2	Q1	Q2	L			
XJ221-25-14	A	0.3-0.75	22-18	2.5	3.0	3.6	6.5	5.0	14.0	2000pcs		
XJ221-28-14	A	0.5-0.75	20-18	2.8	3.2	3.7	6.5	5.0	14.0	2000pcs		
XJ221-30-14	A	0.75-1.5	18-16	3.0	3.0	3.6	6.5	5.0	14.0	2000pcs		
XJ221-32-14	A	0.75-1.5	18-16	3.2	3.2	4.1	6.5	5.0	14.0	2000pcs		
XJ221-35-14	A	1.5-2.5	16-14	3.5	3.5	4.2	6.5	5.0	14.0	2000pcs		
XJ221-40-14	A	14+12or20+18		4.0	4.0	4.6	6.5	5.0	14.0	2000pcs		

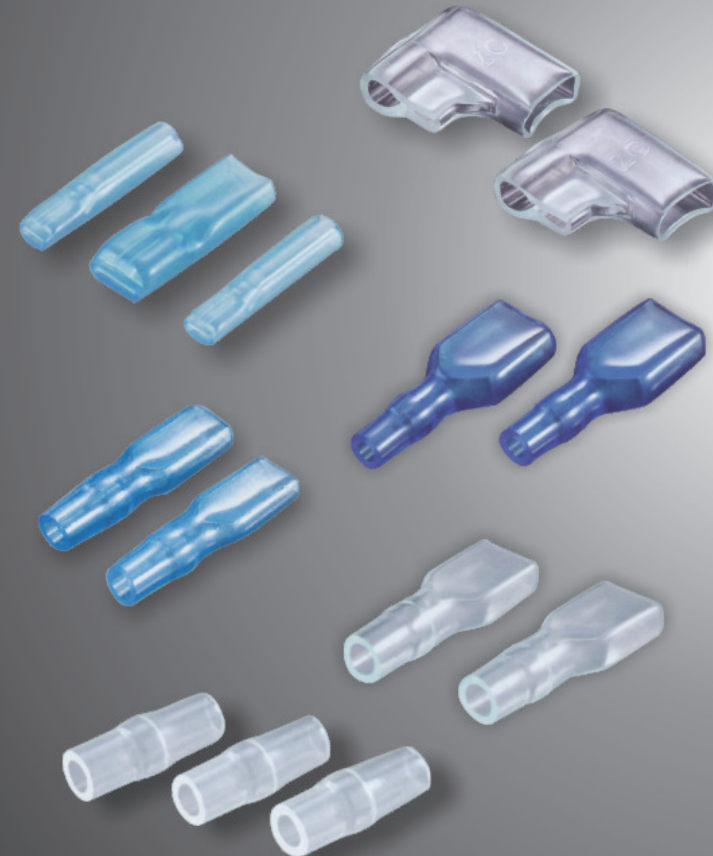

1.00MM间距

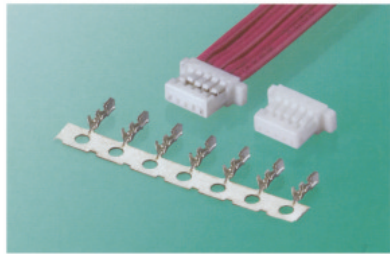


规格 (Specifications)


- 极数: (Poles) :4 to 60P
- 额定电流: (Rating current):1.0A AC , DC
- 额定电压: (Rating voltage):50V AC , DC
- 温度范围: (Temperature range):-25℃ to +85℃
- 接触电阻: (Contact resistance): < 90mΩ
- 绝缘电阻: (Insulation resistance): > 500MΩ
- 耐压: (Withstand voltage):500V/AC/minute
- 适用线规: (Applicable wires): AWG#32 to #28
- 适用基板厚度: (Applicable PC board thickness):1.6mm
- 材料(Material):

孔座(Housing):Nylon66UL 94V-0
针座(Wafer):
插片(Solder Tabs):黄铜镀锡(Brass Tin-Plated)
针(Pin):磷青铜镀金(Phos.Bronze Gold-Plating)
塑座(Base):Nylon 6T UL94V-0


•XJ1001N-B

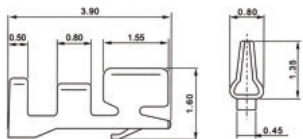

•XJ1001J-NY

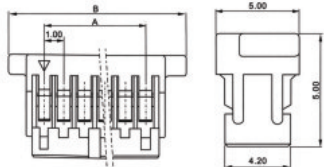

•XJ1001J-NA

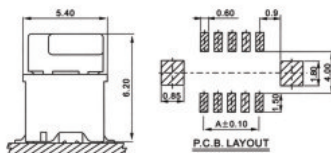

端子 (Terminal)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins.)	Q'ty/reel
	mm ²	AWG#		
100	0.05-0.22	30-24	0.9-1.3	8000pcs


孔座 (Housing)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ1001J-2Y	1.00	5.00
3	XJ1001J-3Y	2.00	6.00
4	XJ1001J-4Y	3.00	7.00
5	XJ1001J-5Y	4.00	8.00


针座 (Wafer)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ1001J-2A	1.00	5.00
3	XJ1001J-3A	2.00	6.00
4	XJ1001J-4A	3.00	7.00
5	XJ1001J-5A	4.00	8.00

•XJ1001J-NA

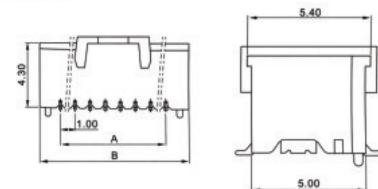

1.50MM间距

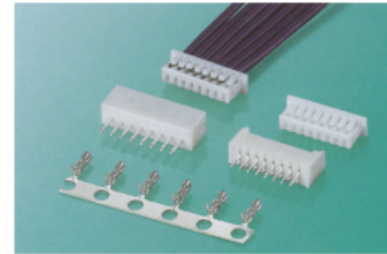


主要技术参数 (Main specifications)


- 线数: (Poles): 2-20
- 适用线规: (Applicable wires): AWG32#-26#
- 适用基板厚度: (Applicable PC board thickness):1.6mm
- 温度范围: (Temperature range):-25℃ -85℃
- 额定电压: (Rating Voltage):50V/AC/DC
- 额定电流: (Rating Current):1A
- 接触电阻: (Contact resistance): < 0.02Ω
- 绝缘电阻: (Insulation resistance): > 500MΩ
- 耐压: (Withstand voltage):500V/AC/1min
- 材料(Material):

孔座(Housing):尼龙Nylon UL94V-0
针座(Wafer):尼龙Nylon UL94V-0
端子(Terminal):磷青铜(Phos.bronze Tin-plated)


•XJ150N-B

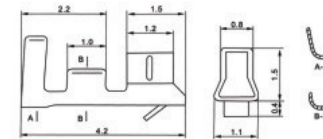

•XJ1500J-Y(ZH)

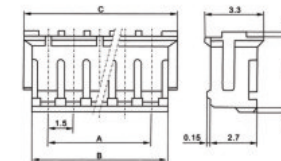

•XJ1500J-A(ZH)

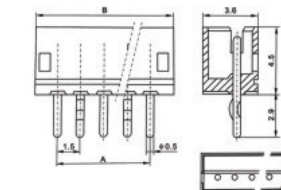

端子 (Terminal) (ZH)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins.)	Q'ty/reel
	mm ²	AWG#		
TP150N-3	0.032-0.14	32-26	0.6-1.2	8000pcs


孔座 (Housing) (ZH)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ1500J-2Y	1.5	4.5
3	XJ1500J-3Y	3.0	6.0
4	XJ1500J-4Y	4.5	7.5
5	XJ1500J-5Y	6.0	9.0


针座 (Wafer) (ZH)

线数 Poles	型号 (Part No.)		尺寸 Dimensions mm	
	直式	弯式	A	B
2	XJ1500J-2A	XJ1500J-2QA	1.5	4.5
3	XJ1500J-3A	XJ1500J-3QA	3.0	6.0
4	XJ1500J-4A	XJ1500J-4QA	4.5	7.5
5	XJ1500J-5A	XJ1500J-5QA	6.0	9.0


2.00MM间距 (PH)

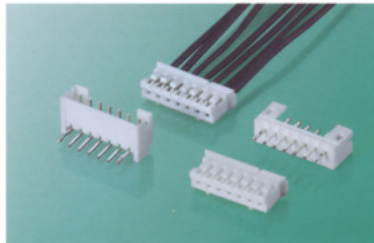


• XJPH00-B




• XJ2006J-Y(PH)

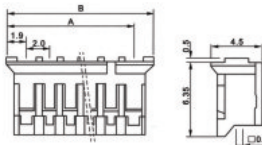

• XJ2006J-A(PH)

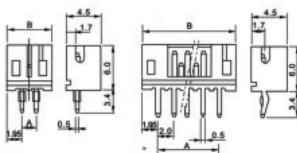

• XJ2006J-QA(PH)

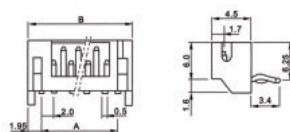

● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#30-#24 #32-#28
- 额定电压 (Rated voltage): 250V
- 额定电流 (Rated current): 1A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): > 1000MΩ
- 耐压 (Withstanding voltage): 800VAC
- 温度范围 (Temp range for usage): -25-85℃
- 适应基板厚度 (PC board thickness): 0.8-1.6mm

端子 (Terminal) (PH)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJPH00-B(A)	0.032-0.08	32-28	0.5-0.9	8000pcs
XJPH00-B(B)	0.05-0.22	30-24	0.9-1.5	8000pcs


塑体 (Housing) (PH)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ2006J-2Y	2.0	5.8
3	XJ2006J-3Y	4.0	7.8
4	XJ2006J-4Y	6.0	9.8
5	XJ2006J-5Y	8.0	11.8
6	XJ2006J-6Y	10.0	13.8
7	XJ2006J-7Y	12.0	15.8
8	XJ2006J-8Y	14.0	17.8
9	XJ2006J-9Y	16.0	19.8
10	XJ2006J-10Y	18.0	21.8
11	XJ2006J-11Y	20.0	23.8
12	XJ2006J-12Y	22.0	25.8
13	XJ2006J-13Y	24.0	27.8
14	XJ2006J-14Y	26.0	29.8
15	XJ2006J-15Y	28.0	31.8


针座 (Wafer) (PH)

线数 Poles	型号 (Part No.)		尺寸 Dimensions mm	
	直式	弯式	A	B
2	XJ2006J-2A	XJ2006J-2QA	2.0	5.9
3	XJ2006J-3A	XJ2006J-3QA	4.0	7.9
4	XJ2006J-4A	XJ2006J-4QA	6.0	9.9
5	XJ2006J-5A	XJ2006J-5QA	8.0	11.9
6	XJ2006J-6A	XJ2006J-6QA	10.0	13.9
7	XJ2006J-7A	XJ2006J-7QA	12.0	15.9
8	XJ2006J-8A	XJ2006J-8QA	14.0	17.9
9	XJ2006J-9A	XJ2006J-9QA	16.0	19.9
10	XJ2006J-10A	XJ2006J-10QA	18.0	21.9
11	XJ2006J-11A	XJ2006J-11QA	20.0	23.9
12	XJ2006J-12A	XJ2006J-12QA	22.0	25.9
13	XJ2006J-13A	XJ2006J-13QA	24.0	27.9
14	XJ2006J-14A	XJ2006J-14QA	26.0	29.9
15	XJ2006J-15A	XJ2006J-15QA	28.0	31.9


2.00MM间距 (SAN)

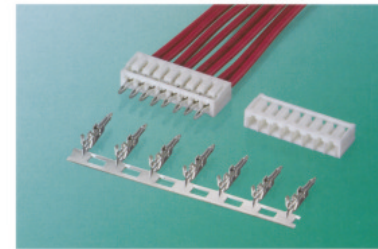

• XJSAN00-B

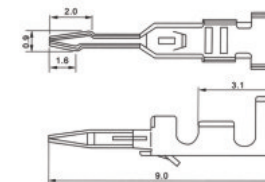

• XJ2008J-Y(SAN)

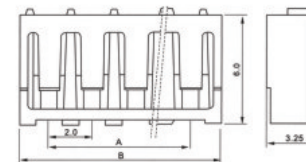

• 安装尺寸 MOUNTING MEASUREMENT



● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#30-#24
- 额定电压 (Rated voltage): 250V
- 额定电流 (Rated current): 1A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): 1000MΩ
- 耐压 (Withstanding voltage): 1000VAC
- 温度范围 (Temp range for usage): -25-85℃
- 适应基板厚度 (PC board thickness): 1.6mm
- 外壳材料 (Metal): 尼龙66(PA66)


端子 (Terminal) (SAN)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJSAN00-B	0.05-0.22	30-24	0.9-1.3	8000PCS

塑体 (Housing) (SAN)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ2008J-2Y	2.0	5.2
3	XJ2008J-3Y	4.0	7.2
4	XJ2008J-4Y	6.0	9.2
5	XJ2008J-5Y	8.0	11.2
6	XJ2008J-6Y	10.0	13.2
7	XJ2008J-7Y	12.0	15.2
8	XJ2008J-8Y	14.0	17.2
9	XJ2008J-9Y	16.0	19.2
10	XJ2008J-10Y	18.0	21.2
11	XJ2008J-11Y	20.0	23.2
12	XJ2008J-12Y	22.0	25.2
13	XJ2008J-13Y	24.0	27.2
14	XJ2008J-14Y	26.0	29.2
15	XJ2008J-15Y	28.0	31.0

2.50MM间距 (XH)

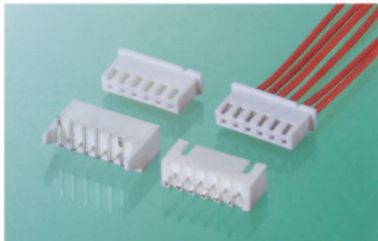

● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#28-#22
- 额定电压 (Rated voltage): 550V
- 额定电流 (Rated current): 3A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): 1000MΩ
- 耐压 (Withstanding voltage): 1000VAC
- 温度范围 (Temp range for usage): -25~85℃
- 适应基板厚度 (PC board thickness): 1.6mm
- 外壳材料 (Metal): 尼龙66(PA66)
- 带有锁紧机构 (With locking arm): Y

端子 (Terminal) (XH)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins.)	Q'ty/reel
	mm ²	AWG#		
XJXH00-BA	0.05-0.13	30-26	0.9-1.3	6000pcs
XJXH00-BB	0.08-0.33	28-22	1.2-1.9	6000pcs


塑体 (Housing) (XH)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm		
		A	B	C
2	XJ2502J-2Y	2.5	5.7	7.3
3	XJ2502J-3Y	5.0	8.2	9.8
4	XJ2502J-4Y	7.5	10.7	12.3
5	XJ2502J-5Y	10.0	13.2	14.8
6	XJ2502J-6Y	12.5	15.7	17.3
7	XJ2502J-7Y	15.0	18.2	19.8
8	XJ2502J-8Y	17.5	20.7	22.3
9	XJ2502J-9Y	20.0	23.2	24.8
10	XJ2502J-10Y	22.5	25.7	27.3
11	XJ2502J-11Y	25.0	28.2	29.8
12	XJ2502J-12Y	27.5	30.7	32.3
13	XJ2502J-13Y	30.0	33.2	34.8
14	XJ2502J-14Y	32.5	35.7	37.3
15	XJ2502J-15Y	35.0	38.2	39.8
16	XJ2502J-16Y	37.5	40.7	42.3
17	XJ2502J-17Y	40.0	43.2	44.8
18	XJ2502J-18Y	42.5	45.7	47.3
19	XJ2502J-19Y	45.0	48.2	49.8
20	XJ2502J-20Y	47.5	50.7	52.3

针座 (Wafer) (XH)

线数 Poles	型号 (Part No.)		尺寸 Dimensions mm	
	直式	弯式	A	B
2	XJ2502J-2A	XJ2502J-2QA	2.5	7.4
3	XJ2502J-3A	XJ2502J-3QA	5.0	9.9
4	XJ2502J-4A	XJ2502J-4QA	7.5	12.4
5	XJ2502J-5A	XJ2502J-5QA	10.0	14.9
6	XJ2502J-6A	XJ2502J-6QA	12.5	17.4
7	XJ2502J-7A	XJ2502J-7QA	15.0	19.9
8	XJ2502J-8A	XJ2502J-8QA	17.5	22.4
9	XJ2502J-9A	XJ2502J-9QA	20.0	24.9
10	XJ2502J-10A	XJ2502J-10QA	22.5	27.4
11	XJ2502J-11A	XJ2502J-11QA	25.0	29.9
12	XJ2502J-12A	XJ2502J-12QA	27.5	32.4
13	XJ2502J-13A	XJ2502J-13QA	30.0	34.9
14	XJ2502J-14A	XJ2502J-14QA	32.5	37.4
15	XJ2502J-15A	XJ2502J-15QA	35.0	39.9
16	XJ2502J-16A	XJ2502J-16QA	37.5	42.4
17	XJ2502J-17A	XJ2502J-17QA	40.0	44.9
18	XJ2502J-18A	XJ2502J-18QA	42.5	47.4
19	XJ2502J-19A	XJ2502J-19QA	45.0	49.9
20	XJ2502J-20A	XJ2502J-20QA	47.5	52.4

2.50MM间距 (EH)

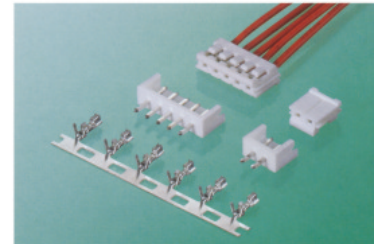

● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#30-#24 #32-#28
- 额定电压 (Rated voltage): 250V
- 额定电流 (Rated current): 1A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): 1000MΩ
- 耐压 (Withstanding voltage): 1000VAC
- 温度范围 (Temp range for usage): -25~85℃
- 适应基板厚度 (PC board thickness): 0.8-1.6mm
- 外壳材料 (Metal): 尼龙66(PA66)
- 带有锁紧机构 (With locking arm): Y

端子 (Terminal) (EH)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins.)	Q'ty/reel
	mm ²	AWG#		
XJEH00-BA	0.032-0.08	32-28	0.5-1.1	7000pcs
XJEH00-BB	0.05-0.3	30-22	1.0-1.9	7000pcs


塑体 (Housing) (EH)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ2504J-2Y	2.5	7.0
3	XJ2504J-3Y	5.0	9.5
4	XJ2504J-4Y	7.5	12.0
5	XJ2504J-5Y	10.0	14.5
6	XJ2504J-6Y	12.5	17.0
7	XJ2504J-7Y	15.0	19.5
8	XJ2504J-8Y	17.5	22.0
9	XJ2504J-9Y	20.0	24.5
10	XJ2504J-10Y	22.5	27.0
11	XJ2504J-11Y	25.0	29.5
12	XJ2504J-12Y	27.5	32.0
13	XJ2504J-13Y	30.0	34.5
14	XJ2504J-14Y	32.5	37.0
15	XJ2504J-15Y	35.0	39.5


针座 (Wafer) (EH)

线数 Poles	型号 (Part No.)		尺寸 Dimensions mm	
	直式	弯式	A	B
2	XJ2504J-2A	XJ2504J-2QA	2.5	7.5
3	XJ2504J-3A	XJ2504J-3QA	5.0	10.0
4	XJ2504J-4A	XJ2504J-4QA	7.5	12.5
5	XJ2504J-5A	XJ2504J-5QA	10.0	15.0
6	XJ2504J-6A	XJ2504J-6QA	12.5	17.5
7	XJ2504J-7A	XJ2504J-7QA	15.0	20.0
8	XJ2504J-8A	XJ2504J-8QA	17.5	22.5
9	XJ2504J-9A	XJ2504J-9QA	20.0	25.0
10	XJ2504J-10A	XJ2504J-10QA	22.5	27.5
11	XJ2504J-11A	XJ2504J-11QA	25.0	30.0
12	XJ2504J-12A	XJ2504J-12QA	27.5	32.5
13	XJ2504J-13A	XJ2504J-13QA	30.0	35.0
14	XJ2504J-14A	XJ2504J-14QA	32.5	37.5
15	XJ2504J-15A	XJ2504J-15QA	35.0	40.0


• XJEH00-B




• XJ2504J-Y(EH)




• XJ2504J-A(EH)




• XJ2504J-QA(EH)




• XJXH00-B




• XJ2502J-NY(XH)




• XJ2502J-A(XH)



• XJ2502J-QA(XH)




2.50MM间距 (SCN)

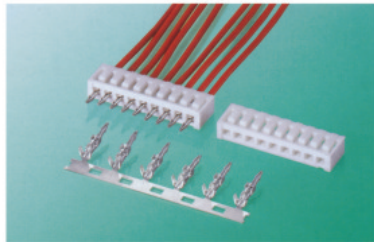


● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#28-#22
- 额定电压 (Rated voltage): 250V
- 额定电流 (Rated current): 3A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): 1000MΩ
- 耐压 (Withstanding voltage): 800V/AC
- 温度范围 (Temp range for usage): -25~+85℃
- 相对湿度 (Relative humidity): 93%+40
- 适应基板厚度 (PC board thickness): 1.2~1.6mm
- 外壳材料 (Material): 尼龙66(PA66)


• XJSCN-A




• XJSCN-B



• XJ2506J-Y(SCN)



• 安装尺寸 MOUNTING MEASUREMENT




端子 (Terminal) (SCN)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJSCN-A	0.08-0.33	22-28	0.9-1.7	7000pcs
XJSCN-B	0.08-0.33	22-28	0.9-1.7	7000pcs

塑体 (Housing) (SCN)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ2506J-2Y	2.5	6.5
3	XJ2506J-3Y	5.0	9.0
4	XJ2506J-4Y	7.5	11.5
5	XJ2506J-5Y	10.0	14.0
6	XJ2506J-6Y	12.5	16.5
7	XJ2506J-7Y	15.0	19.0
8	XJ2506J-8Y	17.5	21.5
9	XJ2506J-9Y	20.0	24.0
10	XJ2506J-10Y	22.5	26.5
11	XJ2506J-11Y	25.0	29.0
12	XJ2506J-12Y	27.5	31.5
13	XJ2506J-13Y	30.0	34.0
14	XJ2506J-14Y	32.5	36.5
15	XJ2506J-15Y	35.0	39.0
16	XJ2506J-16Y	37.5	41.5


2.50MM间距 (JC25)

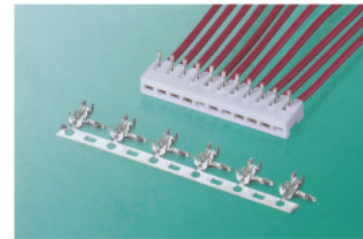


● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#30-#22
- 额定电压 (Rated voltage): 250V
- 额定电流 (Rated current): 3A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): > 1000MΩ
- 耐压 (Withstanding voltage): 1000V/AC
- 温度范围 (Temp range for usage): -25~+85℃
- 适应基板厚度 (PC board thickness): 1.2~1.6mm
- 外壳材料 (Material): 尼龙66(PA66)


• XJJC25-B



• XJ2508J-3(JC25)



• 安装尺寸 MOUNTING MEASUREMENT




端子 (Terminal) (JC)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJJC25-B	0.05-0.3	30-22	1.0-1.8	8000pcs

塑体 (Housing) (JC)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ2508J-2Y	2.5	5.5
3	XJ2508J-3Y	5.0	8.0
4	XJ2508J-4Y	7.5	10.5
5	XJ2508J-5Y	10.0	13.0
6	XJ2508J-6Y	12.5	15.5
7	XJ2508J-7Y	15.0	18.0
8	XJ2508J-8Y	17.5	20.5
9	XJ2508J-9Y	20.0	23.0
10	XJ2508J-10Y	22.5	25.5
11	XJ2508J-11Y	25.0	28.0
12	XJ2508J-12Y	27.5	30.5
13	XJ2508J-13Y	30.0	33.0
14	XJ2508J-14Y	32.5	35.5
15	XJ2508J-15Y	35.0	38.0

2.50MM间距 (SM)

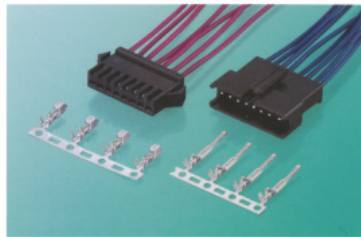

● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range)-AWG#28-#22
- 额定电压 (Rated voltage)-950V
- 额定电流 (Rated current)-3A
- 接触电阻 (Contact resistance) < 0.01mΩ
- 绝缘电阻 (Insulation resistance) > 1000MΩ
- 耐压 (Withstanding voltage)-1000VAC
- 温度范围 (Temp range for usage)-25-85℃
- 适应基板厚度 (PC board thickness)-0.5-2mm

端子 (Terminal) (SM)

型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJSMON-B	0.06-0.33	28-22	1.2-1.9	5000pcs
XJSMOM-B	0.06-0.33	28-22	1.2-1.9	8000pcs


插头 (Plug) (SM)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm	
		A	B
2	XJ2522J-2Y	2.5	5.5
3	XJ2522J-3Y	5.0	8.0
4	XJ2522J-4Y	7.5	10.5
5	XJ2522J-5Y	10.0	13.0
6	XJ2522J-6Y	12.5	15.5
7	XJ2522J-7Y	15.0	18.0
8	XJ2522J-8Y	17.5	20.5
9	XJ2522J-9Y	20.0	23.0
10	XJ2522J-10Y	22.5	25.5
11	XJ2522J-11Y	25.0	28.0
12	XJ2522J-12Y	27.5	30.5

插座 (Socket) (SM)

线数 Poles	型号 (Part No.)	尺寸 Dimensions mm		
		A	B	C
2	XJ2522J-2Y	2.5	5.6	8.1
3	XJ2522J-3Y	5.0	8.1	10.6
4	XJ2522J-4Y	7.5	10.6	13.1
5	XJ2522J-5Y	10.0	13.1	15.6
6	XJ2522J-6Y	12.5	15.6	18.1
7	XJ2522J-7Y	15.0	18.1	20.6
8	XJ2522J-8Y	17.5	20.6	23.1
9	XJ2522J-9Y	20.0	23.1	25.6
10	XJ2522J-10Y	22.5	25.6	28.1
11	XJ2522J-11Y	25.0	28.1	30.6
12	XJ2522J-12Y	27.5	30.6	33.1

3.96MM间距 (VH)

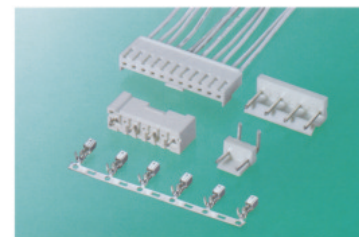

● 主要技术参数 (Main specifications)

- 额定电压 (Rated voltage)-950V
- 额定电流 (Rated current)-5A
- 接触电阻 (Insulation resistance) < 0.01Ω
- 绝缘电阻 (Insulation resistance) > 1000MΩ
- 耐压 (Withstanding voltage)-1500VAC
- 适应基板厚度 (PC board thickness)-0.8-1.6mm
- 温度范围 (Temperature range)-25℃-85℃

端子 (Terminal) (VH)


型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJ3960N-B	0.33-0.83	22-18	1.7-3.0	3000pcs

(Part No.)


针座 (Wafer) (VH)

型号 (Part No.)	型号 (Part No.)			尺寸 Dimensions mm	
	新型直式 (New ertial type)	直式	弯式	A	B
XJ3960J-2Y	-	XJ3960J-2A	XJ3960J-2QA	3.96	7.86
XJ3960J-3Y	XJ3960J-3NA	XJ3960J-3A	XJ3960J-3QA	7.92	11.82
XJ3960J-4Y	-	XJ3960J-4A	XJ3960J-4QA	11.88	15.78
XJ3960J-5Y	XJ3960J-5NA	XJ3960J-5A	XJ3960J-5QA	15.84	19.74
XJ3960J-6Y	-	XJ3960J-6A	XJ3960J-6QA	19.80	23.70
XJ3960J-7Y	XJ3960J-7NA	XJ3960J-7A	XJ3960J-7QA	23.76	27.66
XJ3960J-8Y	-	XJ3960J-8A	XJ3960J-8QA	27.72	31.62
XJ3960J-9Y	-	XJ3960J-9A	XJ3960J-9QA	31.68	35.58
XJ3960J-10Y	-	XJ3960J-10A	XJ3960J-10QA	35.64	39.54
XJ3960J-11Y	-	XJ3960J-11A	XJ3960J-11QA	39.60	43.50
XJ3960J-12Y	-	XJ3960J-12A	XJ3960J-12QA	43.56	47.46


● XJ3960N-B




● XJ3960J-Y(VH)




● XJ3960J-A(VH)




● XJ3960J-QA(VH)



● XJ3960J-NA(VH)




4.5MM间距 (YL)

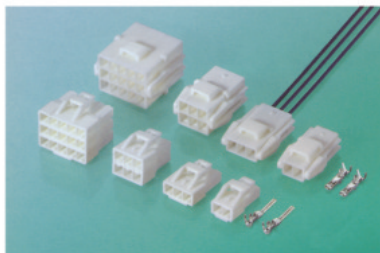

● 主要技术参数 (Main specifications)

- 使用导线范围 (Wire range): AWG#26~#20
- 间距 (Distance): 4.5mm
- 线数 (Lines): 2, 3, 4, 6, 9, 12, 15
- 绝缘电阻 (Insulation resistance): > 1000MΩ
- 接触电阻 (Contact resistance): < 0.01Ω
- 温度范围 (Temp range for usage): -25~+90℃
- 相对湿度 (Relative Humidity): 93%、+40℃
- 带有锁紧机构 (With locking arm): Y


6.2MM间距 (VL)

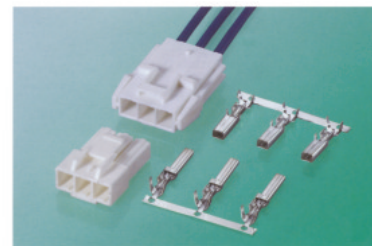


● 主要技术参数 (Main specifications)

- 适用导线范围 (Wire range): AWG#22~#14
- 额定电压 (Rated voltage): 250V
- 额定电流 (Rated current): 15A
- 接触电阻 (Contact resistance): < 0.01Ω
- 绝缘电阻 (Insulation resistance): > 1000MΩ
- 耐压 (Withstanding voltage): 1500V.AC
- 温度范围 (Temp range for usage): -25~85℃
- 外壳材料 (Metal): 尼龙66(PA66)


• XJ4504M-B



• XJ4504N-B



• 安装尺寸 MOUNTING MEASUREMENT




端子 (Terminal) (YL)


型号 (Part No.)	适用电线范围 (Wire Range)		电线外径 (O.D of wire ins)	Q'ty/reel
	mm ²	AWG#		
XJ4504N-3A	0.13-0.5	26-20	1.3-2.5	3500pcs
XJ4504N-3A	0.13-0.5	26-20	1.3-2.5	3500pcs
XJ4504N-3B	0.5-0.75	20-18	2.0-3.4	4500pcs
XJ4504N-3B	0.5-0.75	20-18	2.0-3.4	4500pcs

排数 Rows	线数 Poles	安装尺寸 (Size) (mm)	
		A	B
单项	2, 3	9.5	10.8
二项	4, 6, 8, 12, 16	15.3	16.6
三项	9, 12, 15, 21	20.5	21.8


• XJ6204T-B



• XJ6204M-B



型号 (Part No.)	适用电线范围 (Wire Range)		材料 (Material)	尺寸 (Size) (mm)			插片厚度 (Tab Thickness)	材料厚度 (Material Thickness)	Q'ty/reel	备注 Note
	mm ²	AWG#		W	L	E				
XJ6204T-3A	0.35-0.75	22-18	磷铜 Phosther Bronze	4.1	19.4	8.5	2.0	0.25	2000pcs	
XJ6204T-3B	1.25-2.27	16-14		4.1	19.4	8.5	2.0	0.25	2000pcs	
XJ6204T-3C	3.5	12		4.1	19.4	8.5	2.0	0.25	2000pcs	
XJ6204M-3A	0.35-0.75	22-18		3.2	23.2	11.0	2.0	0.3	2000pcs	
XJ6204M-3B	1.25-2.27	16-14		3.2	23.2	11.0	2.0	0.3	2000pcs	
XJ6204M-3C	3.5	12		3.2	23.2	11.0	2.0	0.3	2000pcs	

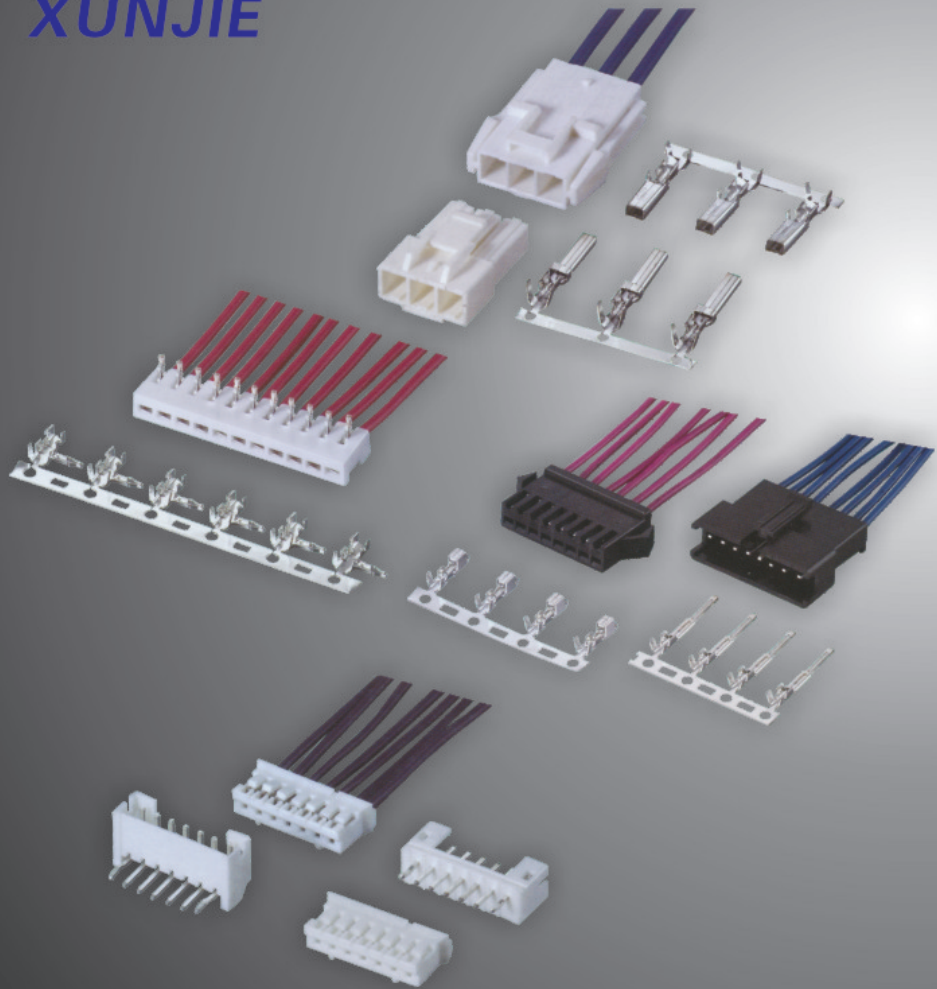

备注栏
